



**BERÉNYI**  
**MAGTISZTÍTÓ GÉPEK**



### TECHNICAL DATA SHEET

#### **S-800-INOX Seed cleaning machine**

**The S-800-INOX Seed cleaning machine is manufactured using stainless steel according to food hygiene requirements:** primarily we recommend for those farmers who are working in the field of food raw material production and processing, also for organic producers and manufacturers engaged in food production. We use certified stainless steel raw materials during production to guarantee the high quality and reliability expected of the cleaned product.

The material to be cleaned contacts only the stainless steel surface during the cleaning process thus it is all in compliance with the food regulations.

#### **Specifications:**

Weight: 130 kg

Propulsion engine: 230V, 0.75 KW

Dimensions (length x width x height): 2160x930x1530 mm

**Its cleaning performance with wheat is 1000-1600kg per hour!**

#### **CE classification**

#### **Ventilator's fan:**


It works efficiently at low noise levels. It provides a full airing of the seeds to be cleaned. It removes the dust, husks, light seeds and other light-density materials. It provides high efficiency for cleaning all types of grain and seed. The airflow can be adjusted with four shutters. It's lightweight and easy to operate.

#### **Cleaner's operations:**

The machine cleans and classifies the seeds according to weight and size. Due to its precisely tuned stroke and engine speed the cleaning effect of the sieves is maximally ensured. Among the three sieves in the cabinet of sieve, the top and middle sieves between stepsless tilting 0-10 grades, the lower one can be adjusted in 3 grades. The replacement of the sieves can be done quickly and easily within a short time. The S-800-INOX Seed cleaning machine is equipped with 3 pieces of inox sieves ready to operate.


**Perforated inox sieves you can order for the S-800-INOX Seed cleaning machine:**

#### **Rv – round holes of the sieve**

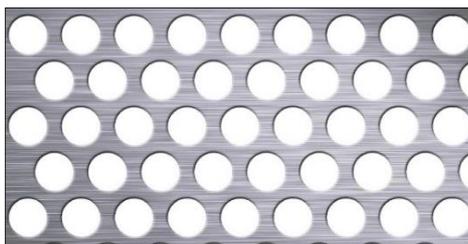

**Diameter of the round holes  $\varnothing$  (mm):** 1,5 2,0 2,5 3,0 3,5 4,0 4,5 5,0 5,5 6,0 6,5 7,0 7,5 8,0 8,5 9,0 10,0 11,0 12,0 13,0 14,0 16,0 17,0 18,0

## Lv – oblong holes of the sieve

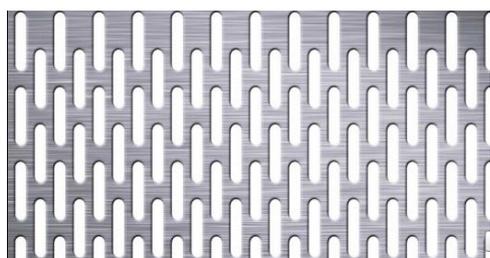

**Size of the slots width/length ≠ (mm):** 1,0 x 20 1,2 x 20 1,4 x 20 1,5 x 20 1,8 x 20 2,0 x 20  
2,2 x 20 2,4 x 20 2,5 x 20 2,8 x 20 3,0 x 20 3,2 x 20 3,5 x 20 3,8 x 20 4,0 x 20 4,5 x 20 5,0 x 20  
6,0 x 20 7,0 x 20 8,0 x 20

For cleaning small seeds we can provide sieves with holes under 1mm equipped with stainless steel (inox) wire cloth from 0,4mm hole-size.

## Comparison of our seed cleaning machines:

	S-800	S-800-INOX	S-800-SPECIAL	S-800-SPECIAL-INOX
Propulsion	1 motor	1 motor	2 motors + 2 frequency inverters	2 motors + 2 frequency inverters
Regulate the air flow power	controlled by opening and closing with 4 shutters	controlled by opening and closing with 4 shutters	controlled by 1 motor with frequency inverters, stepless between 0-100%. We can turn it off completely.	controlled by 1 motor with frequency inverters, stepless between 0-100%. We can turn it off completely.
Speed of movement of the sieve-cabinet	fixed	fixed	controlled by 1 motor with frequency inverters, stepless between the given values	controlled by 1 motor with frequency inverters, stepless between the given values
Regulate the angle of the top sieve	2 grades	between stepless tilting 0-10 grades	between stepless tilting 0-10 grades	between stepless tilting 0-10 grades
Regulate the angle of the middle sieve	1 grade	between stepless tilting 0-10 grades	between stepless tilting 0-10 grades	between stepless tilting 0-10 grades
Regulate the angle of the lower sieve	2 grades	3 grades	2 grades	3 grades
The hopper, the sieve-cabinet with the sieves are all made of stainless steel (inox)	no	yes	no	yes

**CRYSTAL-MEZŐTÚR KFT.**  
5400 Mezőtúr  
Vásár út 35.  
Hungary  
0036-209-828-928  
info@seedcleaner.eu  
seedcleaner1@gmail.com  
www.seedcleaner.eu

